
Flying Scot® under-seat Hankster Storage Hammocks - Installation

Included in the hammock package for each hammock is:

- The hammock bed
- A piece of ¼" shockcord with one end clamped in a loop
- A stainless eye strap with screws


Tool required for installation:

- A Philips head screwdriver
- Cordless drill and 5/32 bit


The hammocks are designed to fit under the forward part of the cockpit seats. One end of the hammock is attached around the seat brace at the midway point on the seat. The other end is attached to the Philips head screw holding an edge of the storage locker mounted under the foredeck.

Feed the shockcord into a long edge of the hammock bed. Feed the shockcord back through the other long edge. Position the hammock so the looped end is forward; and the clamped and bitter ends aft.

Move forward until you are under the storage locker. Unscrew the aft-most screw holding the locker. Put the stainless eye strap around the shockcord; insert one of the new screws and tighten. With the eye strap parallel to the edge of the locker, drill a 5/32" hole that is about ½" deep. Insert the second new screw and tighten.

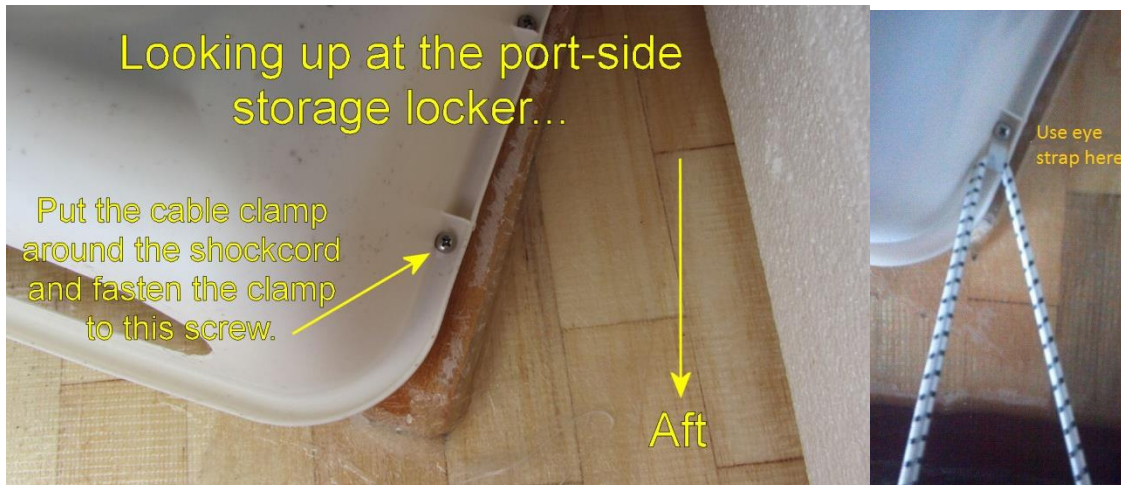

Then, feed the two ends of the shockcord around the seat brace:

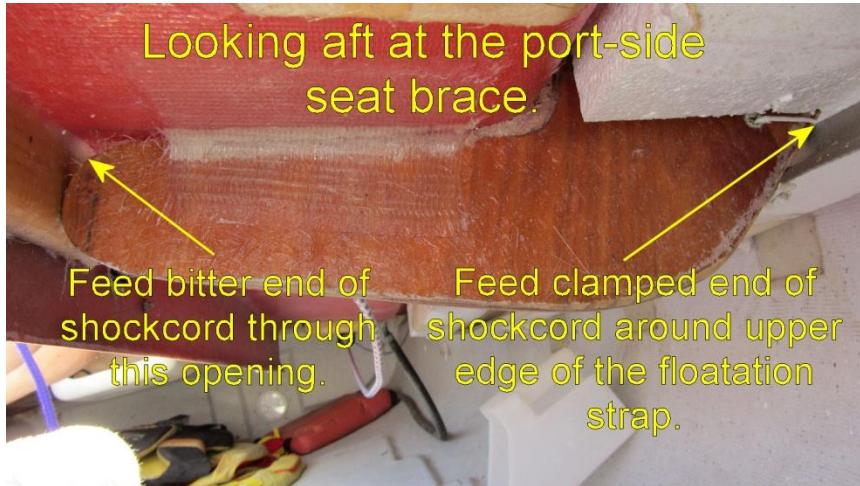

Feed the bitter end of the shockcord through the clamped end and tie a stopper knot:

